















# OIL SEALS











---

**PETSEALS INDUSTRIES LTD.**  
**[www.petseals.com](http://www.petseals.com)**


# INDEX

PROFILE	TYPE	MATERIAL	TEMPERATURE	PRESSURE (kgf/cm <sup>2</sup> )	PAGE
	SC	FKM	-15°C ~ 150°C	0.3	1
		NBR	-30°C ~ 120°C	0.3	
	TC	NBR+STEEL	-30°C ~ 120°C	0.3	2
	TB (TBY)	NBR+STEEL SILICONE+STEEL	-30°C ~ 120°C	0.3	3
	TB2	NBR+STEEL	-30°C ~ 120°C	0.3	4
	VC	NBR+STEEL	-30°C ~ 120°C	--	5
	VB	NBR+STEEL	-30°C ~ 120°C	--	6
	TCV	FKM+STEEL	-15°C ~ 150°C	3	7
		XNBR+STEEL	-15°C ~ 80°C		
	ISP1D	FKM+STEEL	-15°C ~ 150°C	3	9
		XNBR+STEEL	-15°C ~ 80°C		
	TCN	FKM+STEEL	-15°C ~ 150°C	10	10
		XNBR+STEEL	-15°C ~ 80°C		
	DCY	FKM+STEEL	-15°C ~ 150°C	0.3	12
		XNBR+STEEL	-15°C ~ 80°C		
	SCY	NBR+STEEL	-30°C ~ 100°C	6	13
	STR	NBR+NY+STEEL	-30°C ~ 100°C	10	14

# INDEX

PROFILE	TYPE	MATERIAL	TEMPERATURE	PRESSURE (kgf/cm <sup>2</sup> )	PAGE
	TC4 (SD)	NBR+STEEL	-30°C ~ 100°C	6	15
	TC4WY	NBR+STEEL	-30°C ~ 100°C	6	16
	KCY	NBR+STEEL	-30°C ~ 120°C	--	17
	SWING	NBR+STEEL	-30°C ~ 120°C	0.3	18
	DKN (KFY)	NBR+STEEL	-30°C ~ 120°C	-	20
	COMBI	NBR/FKM+STEEL	-30°C ~ 80°C	0.3	22
	CASSETTE	NBR+PU+STEEL	-30°C ~ 80°C	0.3	23
	OHTG9W	NBR+STEEL	-30°C ~ 120°C	0.3	24

SC




APPLICATION		
MATERIAL	FKM+STEEL	NBR+STEEL
TEMP.	-15°C~150°C	-30°C~120°C
PRESSURE	0.3kgf/cm2	0.3kgf/cm2

ITEM	ID	OD	H	ITEM	ID	OD	H
SC 20*42*7	20	42	7	SC 50*75*10	50	75	10
SC 22*36*8	22	36	8(10)	SC 60*80*10	60	80	10
SC 25*52*7	25	52	7	SC 60*90*10	60	90	10
SC 35*48*6	35	48	6	SC 70*90*10	70	90	10
SC 45*65*8	45	65	10/8	SC 165.1*190.5*13.5	165.1	190.5	13.5
SC 47.6*72*8	47.6	72	8				

PETSEALS

# TC




APPLICATION	
MATERIAL	NBR+STEEL
TEMP.	-30°C~120°C
PRESSURE	0.3kgf/cm2

ITEM	ID	OD	H	ITEM	ID	OD	H
TC 17*28*7	17	28	7	TC 50*75*10	50	75	10
TC 19*32*8	19	32	8	TC 75*95*10	75	95	10
TC 30*42*7	30	42	7	TC-90*110*10	90	110	10
TC 40*62*10	40	62	10	TC 90*120*12	90	120	12
TC 45*58*7	45	58	7	TC 105*130*12	105	130	12
TC 45*75*10	45	75	10				


PETSEALS

**TB**




APPLICATION	
MATERIAL	NBR+STEEL
	SILICONE+IRON
TEMP.	-30°C~120°C
PRESSURE	0.3 kgf/cm <sup>2</sup>

ITEM	ID	OD	H	ITEM	ID	OD	H
TB 15*32*10	15	32	10	TB 75*100*13	75	100	13
TB 22*42*10	22	42	10	TB 80*105*13	80	105	13
TB 25*33*6	25	33	6	TB 85*110*13	85	110	13
TB 45*68*12	45	68	12	TB 95*120*13	95	120	13
TB 48*70*12	48	70	12	TB 105*135*14	105	135	14
TB 55*78*12	55	78	12	TB 140*170*14	140	170	14
TB 60*82*12	60	82	12	TB 145*175*14	145	175	14
TB 65*77*12	65	77	12	TB 150*180*14	150	180	14
TB 65*90*13	65	90	13	TB 240*275*16	240	275	16
TB 70*92*12	70	92	12	TB 280*320*22	280	320	22

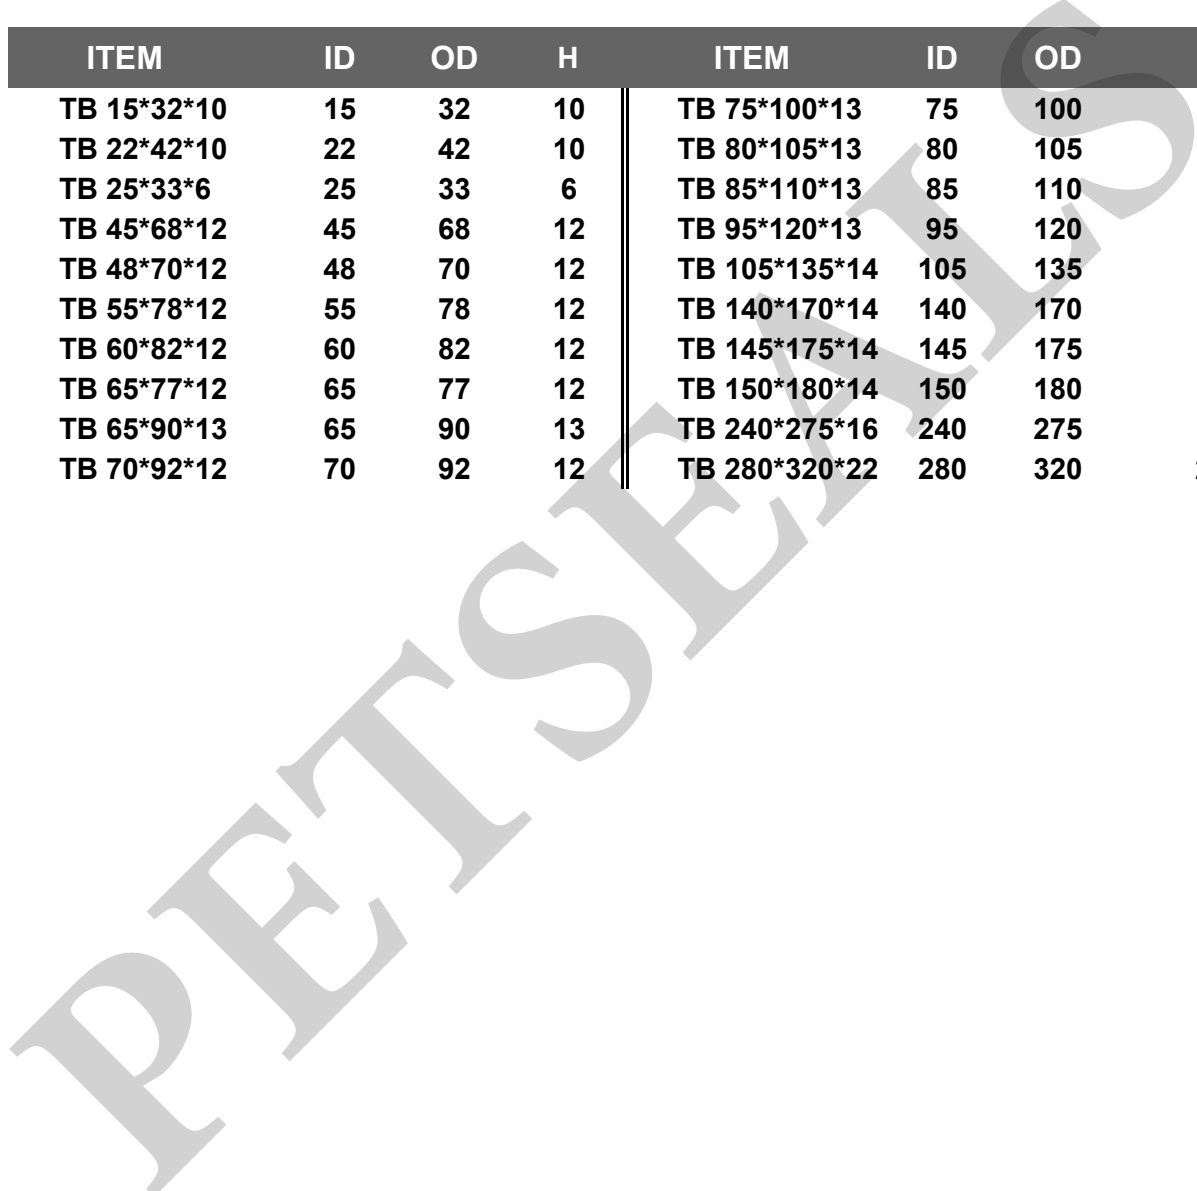

# TB2




APPLICATION	
MATERIAL	NBR+STEEL
TEMP.	-30°C~120°C
PRESSURE	0.3 kgf/cm <sup>2</sup>

ITEM	ID	OD	H
TB2-50*80*10	50	80	10
TB2-90*115*14	90	115	14
TB2-100*125*14	100	125	14

PETSEALS

VC




APPLICATION	
MATERIAL	NBR+STEEL
TEMP.	-30°C~120°C

ITEM	ID	OD	H
VC 25.4*31.84*4.2	25.4	31.84	4.2

PETSEALS




**VB**



APPLICATION	
MATERIAL	NBR+STEEL
TEMP.	-30°C~120°C

ITEM	ID	OD	H
VB 25*32*4	25	32	4
VB 60*70*5	60	70	5
VB 70*80*5	70	80	5
VB 80*90*5	80	90	5
VB 85*95*5	85	95	5
VB 85*100*5.5	85	100	5.5
VB 115*135*6	115	135	6
VB 125*140*7	125	140	7
VB 155*170*7	155	170	7
VB 33*45*5	33	45	5
VB 40*52*5	40	52	5
VB 45*55*7	45	55	7
VB 45*52*7	45	52	7
VB 50*60*7	50	60	7
VB 60*70*7	60	70	7
VB 63*75*7	63	75	7
VB 90*100*5	90	100	5


# TCV



APPLICATION		
MATERIAL	FKM+STEEL	NBR+STEEL
TEMP.	-15°C~150°C	-15°C~80°C
PRESSURE	3kgf/cm <sup>2</sup>	3kgf/cm <sup>2</sup>

PART NO.	ITEM	ID	OD	H	
AP0598	TCV 12*22*8	12	22	8	
	TCV 12*25*7	12	25	7	
	TCV 15*30*7	15	30	7	
	TCV 16*28*7	16	28	7	
AP0687	TCV 16*30*7	16	30	7	
	TCV 17*28*8	17	28	8	
AP0743	TCV 17*30*7/8	17	30	7/8	
	TCV 17*32*8	17	32	8	
	TCV 17*35*7	17	35	7	
	TCV 17.45*30.15*7.95	17.45	30.15	7.95	
AP1148	TCV 18*30*6/6.5	18	30	6/6.5	
	TCV 19*31.7*5	19	31.7	5	
	TCV 19*32*7/8	19	32	7/8	
	TCV 20*30*7	20	30	7	
	TCV 20*35*8	20	35	8	
	TCV 22*36*7	22	36	7	
	TCV 22*42*7	22	42	7	
	TCV 22*42*11	22	42	11	
	TCV 24*40*8	24	40	8	
	TCV 25.4*44.45*7.02	25.4	44.45	7.02	
	TCV 28*40*6	28	40	6	
	TCV 29.36*42.82*7.92	29.36	42.82	7.92	
	TCV 30*42*6	30	42	6	
	AP1709	TCV 30*50*11	30	50	11
		TCV 30*52*11	30	52	11
		TCV 31.75*44.45*6.35	31.75	44.45	6.35
TCV 32*45*8		32	45	8	
AP2085H2	TCV 32*52*11	32	52	11	
	TCV 34.92*52*6/6.8	34.92	52	6/6.8	
	TCV 35*55*11	35	55	11	
	TCV 35*72*10	35	72	10	
	TCV 35*72*12	35	72	12	
	TCV 36.53*50.8*7.92	36.53	50.8	7.92	
	TCV 38*58*11	38	58	11	
	TCV 38.1*57.15*9.5/10.5	38.1	57.15	9.5/10.5	
6V2318	TCV 40*62*11	40	62	11	
	TCV 41.28*53.85*6.35	41.28	53.85	6.35	

# TCV




APPLICATION		
MATERIAL	FKM+STEEL	NBR+STEEL
TEMP.	-15°C~150°C	-15°C~80°C
PRESSURE	3kgf/cm <sup>2</sup>	3kgf/cm <sup>2</sup>

PART NO.	ITEM	ID	OD	H
	TCV 42*62*7/7.9	42	62	7/7.9
	TCV 44.45*60*7/8	44.45	60	7/8
	TCV 48*62*9	48	62	9
	TCV 55*75*7/7.9	55	75	7/7.9
	TCV 60*78*9	60	78	9
	TCV 60*80*7/8	60	80	7/8
	TCV 60*82*9	60	82	9

PETSEALS


# ISP1D



APPLICATION		
MATERIAL	FKM+STEEL	NBR+STEEL
TEMP.	-15°C~150°C	-15°C~80°C
PRESSURE	3kgf/cm <sup>2</sup>	3kgf/cm <sup>2</sup>

ITEM	ID	OD	H
ISP1D 12.4*25.4*7.9/8.5	12.4	25.4	7.9/8.5
ISP1D 14*25*7	14	25	7
ISP1D 20*32*7/7.9	20	32	7/7.9
ISP1D 22*32*7	22	32	7
ISP1D 22*36*10/11	22	36	10/11
ISP1D 25*42*6.5/7.3	25	42	6.5/7.3
ISP1D 28*40*8/8.9	28	40	8/8.9
ISP1D 35*47*7/8	35	47	7/8
ISP1D 35*50*8/9	35	50	8/9
ISP1D 35*52*6/6.9	35	52	6/6.9
ISP1D 35*52*6/7	35	52	6/7
ISP1D 40*42*6/7	40	62	6/7
ISP1D 45*62*7/8	45	62	7/8
ISP1D 45*62*9/9.5	45	62	9/9.5
ISP1D 45*65*6/7	45	65	6/7
ISP1D 45*65*7/7.9	45	65	7/7.9
ISP1D 45*68*12	45	68	12
ISP1D 50*72*7/8	50	72	7/8
ISP1D 52*72*7/8	52	72	7/8
ISP1D 55*70*8/8.5	55	70	8/8.5
ISP1D 55*75*7/8	55	75	7/8
ISP1D 55*78*8/9	55	78	8/9
ISP1D 70*90*7	70	90	7


# TCN



APPLICATION		
MATERIAL	FKM+STEEL	NBR+STEEL
TEMP.	-15°C~150°C	-15°C~80°C
PRESSURE	10kgf/cm <sup>2</sup>	10kgf/cm <sup>2</sup>

PART NO.	ITEM	ID	OD	H
	<b>TCN 20*40*11</b>	<b>20</b>	<b>40</b>	<b>11</b>
	TCN 22*42*11	22	42	11
	TCN 25*45*11	25	45	11
	TCN 25*45*12.5	25	45	12.5
AP1563	TCN 28*48*11	28	48	11
AP1709	TCN 30*50*11	30	50	11
	TCN 30*50*12.5	30	50	12.5
AP1904	TCN 32*52*11	32	52	11
UP0450E	TCN 33.02*72.29*9.5	33.02	72.29	9.5
AP2085	TCN 35*55*11	35	55	11
	TCN 35*55*12	35	55	12
	TCN 35*60*15	35	60	15
AP2240	TCN 38*58*11	38	58	11
AP2379	TCN 40*60*12	40	60	12
AP2388	TCN 40*62*11	40	62	11
	TCN 40*62*12	40	62	12
AP2507	TCN 42*65*12	42	65	12
	TCN 44.5*63.5*9.5	44.5	63.5	9.5
AP2668	TCN 45*68*12	45	68	12
AP2791	TCN 48*70*12	48	70	12
AP2864	TCN 50*72*12	50	72	12
	TCN 52*75*12	52	75	12
AP3055	TCN 55*78*12	55	78	12
AP3222	TCN 60*82*12	60	82	12
AP3297	TCN 62*85*12	62	85	12
	TCN 65*90*9	65	90	9
AP3409	TCN 65*90*13	65	90	13
	TCN 68*90*14	68	90	14
AP3527	TCN 70*95*13	70	95	13
	TCN 72*95*13	72	95	13
	TCN 75*95*11	75	95	11
AP3618	TCN 75*100*13	75	100	13
AP3744	TCN 80*105*13	80	105	13
AP3842	TCN 85*110*13	85	110	13
AP3932	TCN 90*115*13	90	115	13
AP3994	TCN 95*120*13	95	120	13
AP4063	TCN 100*125*13	100	125	13


# TCN



APPLICATION		
MATERIAL	FKM+STEEL	NBR+STEEL
TEMP.	-15°C~150°C	-15°C~80°C
PRESSURE	10kgf/cm <sup>2</sup>	10kgf/cm <sup>2</sup>

PART NO.	ITEM	ID	OD	H
AP4153	TCN 105*135*14	105	135	14
AP4212	TCN 110*140*14	110	140	14
AP4282	TCN 115*145*14	115	145	14
AP4346	TCN 120*150*14	120	150	14
AP4399	TCN 125*155*14	125	155	14
AP4451	TCN 130*160*14	130	160	14
AP4498	TCN 135*165*14	135	165	14
AP4542	TCN 140*170*14	140	170	14
AP4624	TCN 150*180*14	150	180	14
AP4795	TCN 170*200*16	170	200	16
	TCNY 22*36*10	22	36	10
	<b>TCNY 35*60*15</b>	<b>35</b>	<b>60</b>	<b>15</b>
	TCNY 45*65*12	45	65	12

**DCY**




APPLICATION		
MATERIAL	FKM+STEEL	NBR+STEEL
TEMP.	-15°C~150°C	-15°C~80°C
PRESSURE	0.3kgf/cm <sup>2</sup>	0.3kgf/cm <sup>2</sup>

ITEM	ID	OD	H
DCY 60*82*12	60	82	12

PETSEALS

# SCY




APPLICATION	
MATERIAL	NBR+STEEL
TEMP.	-30°C~100°C
PRESSURE	6kgf/cm <sup>2</sup>

ITEM	ID	OD	H
SCY 16*28*7	16	28	7
SCY 18*28*8	18	28	8

PETSEALS



# STR




APPLICATION	
MATERIAL	NBR+NY+STEEL
TEMP.	-30°C~100°C
PRESSURE	10kgf/cm <sup>2</sup>

ITEM	ID	OD	H
STR 32*44.5*9.5	32	44.5	9.5

PETSEALS

**TC4**




APPLICATION	
MATERIAL	NBR+STEEL
TEMP.	-30°C~100°C
PRESSURE	6kgf/cm <sup>2</sup>

ITEM	ID	OD	H
TC4 22.4*40*10	22.4	40	10

PETSEALS

# TC4WY




APPLICATION	
MATERIAL	NBR+STEEL
TEMP.	-30°C~100°C
PRESSURE	6kgf/cm <sup>2</sup>

ITEM	ID	OD	H
TC4WY 9*20.2*6	9	20.2	6
TC4WY 12*24*2/7	12	24	2/7
TC4WY 14*25*2.1/5.9	14	25	2.1/5.9
TC4WY 15*27*2.2/6.9	15	27	2.2/6.8
TC4WY 15.8*30.5*2.9/6.7	15.8	30.5	2.9/6.7
TC4WY 19*35*2.3/7	19	35	2.3/7
<b>TC4WY 20*32.2*2/7</b>	<b>20</b>	<b>32</b>	<b>2/7</b>
TC4WY 21.4*34.8*2/6.4	21.4	34.8	2/6.4
TC4WY 22*34*2.1/6.2	22	34	2.1/6.2
TC4WY 22*40*2.5/7	22	40	2.5/7
TC4WY 26*38.6*2.4/6.3	26	38.6	2.4/6.3
TC4WY 26*44*2.5/7	26	44	2.5/7

PET SEALS

# KCY





APPLICATION	
MATERIAL	NBR+STEEL
TEMP.	-30°C~120°C

ITEM	ID	OD	H
KCY 18.5*30*3.7/4.5	18.5	30	3.7/4.5
KCY 22*34.5*2/5.7	22	34.5	2/5.7
KCY 29*40.8*2/5.5	29	40.8	2/5.5

PETSEALS


# TB, TB2, DA2, DB, 15Z




APPLICATION	
MATERIAL	NBR+STEEL
TEMP.	-30°C~120°C
PRESSURE	0.3kgf/cm <sup>2</sup>

ITEM	ID	OD	H	MATERIAL L	PART NO.
TB 25*33*6	25	33	6		
TB 45*68*12	45	68	12		AD2668
TB 48*70*12	48	70	12		AD2791
TB 55*78*12	55	78	12		AD3055
TB 60*82*12	60	82	12		AD3222
TB 65*77*12	65	77	12		
TB 65*90*13	65	90	13		AD3409
TB 70*92*12	70	92	12		AD3519
TB 75*100*13	75	100	13		07012-00075
TB 80*105*13	80	105	13		AD3618G-S
					AD3744
TB2-50*80*10	50	80	10		
TB2-90*115*14	90	115	14		
TB2-100*125*14	100	125	14		
DA2-125	125	155	18	XNBR	BW0760F
DB-020	20	40	17		
DB-070	70	95	20		
DB-075	75	100	20		
DB-090	90	120	18		
DB-110	110	140	22		
15Z-20	20	35	8		
15Z-22	22	42	10		
15Z-25	25	42	10		
15Z-25	25	45	10		
15Z-32	32	52	11		
15Z-45	45	68	12		
15Z-80	80	100	10		
15Z-90	90	110	10		
15Z-140	140	170	17		
15Z-150	150	180	15.2		
15Z-155	155	180	15		
15Z-160	160	190	16.5		
15Z-160	160	190	24.5		


# TB, TB2, DA2, DB, 15Z



TB




TB2



DA2



DB




15Z

APPLICATION	
MATERIAL	NBR+STEEL
TEMP.	-30°C~120°C
PRESSURE	0.3kgf/cm <sup>2</sup>

ITEM	ID	OD	H	MATERIAL L	PART NO.
19Z-74.8	74.8	90	6		
19Z-79.8	79.8	95	6		
31Z-66	66	79	12.5		
31Z-78	78	105	15.4		

PETSEALS


# DKN

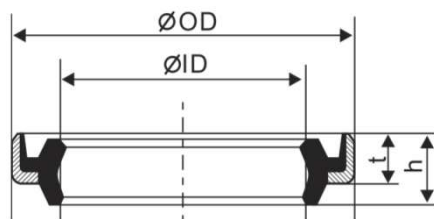

APPLICATION	
MATERIAL	NBR+STEEL
TEMP.	-30°C~120°C

ITEM	ID	OD	t	h
DKN-016	16	26	5	7
DKN-018	18	30	6	9
DKN-019	19	31	6	9
DKN-020	20	32	6	9
DKN-022	22	32	6	9
DKN-022	22	34	6	9
DKN-025	25	37	6	9
DKN-028	28	40	6	9
DKN-030	30	42	6	9
DKN-030	30	45	6	9
DKN-030	30	47	7	10
DKN-032	32	44	7	10
DKN-032	32	52	8	11
DKN-035	35	47	7	10
DKN-040	40	52	7	10
DKN-040	40	62	7	10
DKN-045	45	57	7	10
DKN-045	45	68	7	10
DKN-050	50	62	7	10
DKN-050	50	72	8	11
DKN-055	55	69	8	11
DKN-056	56	70	8	11
DKN-060	60	74	8	11
DKN-060	60	82	11	15
DKN-065	65	79	8	11
DKN-070	70	84	8	11
DKN-075	75	89	8	11
DKN-080	80	94	8	11
DKN-085	85	99	8	11
DKN-090	90	104	8	11
DKN-090	90	110	9	12
DKN-095	95	109	8	11
DKN-100	100	114	8	11
DKN-105	105	121	9	12
DKN-110	110	126	9	12
DKN-112	112	128	9	12
DKN-115	115	131	9	12
DKN-120	120	136	9	12

# DKN

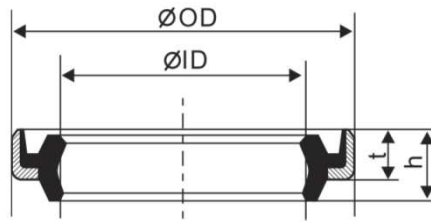


APPLICATION	
MATERIAL	NBR+STEEL
TEMP.	-30°C~120°C

ITEM	ID	OD	t	h
DKN-125	125	141	9	12
DKN-130	130	146	9	12
DKN-140	140	160	10	14
DKN-150	150	170	10	14
DKN-155	155	175	10	14
DKN-160	160	180	10	14
DKN-170	170	190	10	14
DKN-180	180	205	12	17
DKN-190	190	210	10	14
DKN-190	190	215	12	17
DKN-200	200	225	12	17
DKN-210	210	230	12	17
DKN-210	210	235	12	14
DKN-225	225	250	12	17
DKN-250	250	275	12	17



# WHEEL HUB SEAL

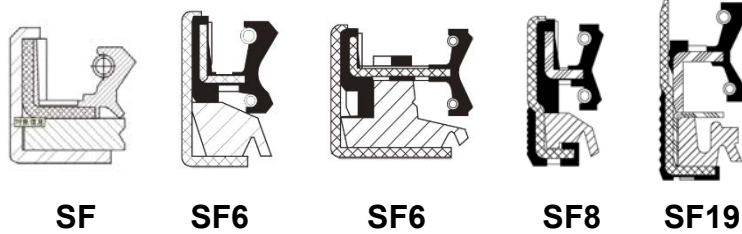

APPLICATION	
MATERIAL	NBR/FKM+STEEL
TEMP.	-30~80°C
PRESSURE	0.3kgf/cm <sup>2</sup>

PART NO.	ITEM	ID	OD	H	
<b>COMBI</b>					
12001879B		SF-030*44*11	30	44	11
12001882B	CARRARO	SF-035*52*16	35	52	16
12001887		SF-040*58*10	40	58	10
		SF-040*58*13	40	58	13
12001889B	CARRARO	SF-042*62*14	42	62	14
12012296		SF-045*62*11	45	62	11
12011969B	CARRARO	SF-045*65*12	45	65	12
004/50009		SF-045*65*15	45	65	15
		SF-045*65*16	45	65	16
		SF-050*73*8	50	73	8
12012503		SF-050*75*12	50	75	12
12013176		SF-055*80*10	55	80	10
		SF-055*90*8/16	55	90	8/16
904/07300		BASL-65*90*10	65	90	10
12001910		SF-090*120*13	90	120	13
12013519B		SF6-030*44*14	30	44	14
12012107B	CATERPILLAR	SF6-040*60*18.5	40	60	18.5
12012377B		SF6-045*65*18.5	45	65	18.5
12016669B		SF6-046.15*80*16.5	46.15	80	16.5
85824345	CARRARO	SF8-045*60*16	45	60	16
01027624B	CATERPILLAR	SF19-046*65*21	46	65	21
		SF19-060*75*17/19	60	75	17/19
813/00303		BARS127*146.05*11.1	127	146.05	11.1


# WHEEL HUB SEAL



APPLICATION	
MATERIAL	NBR+PU+STEEL
TEMP.	-30~80°C
PRESSURE	0.3kgf/cm <sup>2</sup>

PART NO.	ITEM	ID	OD	H
<b><u>CASSETTE</u></b>				
	127*160*15.5/17.5	127.00	160.00	15.5/17.5
	145*175*14.5/15.5	145.00	175.00	14.5/15.5
	150*180*14.5/15.5	150.00	180.00	14.5/15.5
904/13600	25*52*11.5/18	25.00	52.00	11.5/18
12015223	25*52*12	25.00	52.00	12.00
12019775B	CARRARO 35*65*14.5/17	35.00	65.00	14.5/17
12018678B	CATERPILLAR 53.2*78*13/14	53.20	78.00	13/14
12018036	56*80*13/14.5	56.00	80.00	13/14.5
12019068	127*160*15.5/17.5	127.00	160.00	15.5/17.5
311569 A1	CASE 130*160*14.5/16 NBR	130.00	160.00	14.5/16
CAR47700	CARRARO 130*160*17 NBR	130.00	160.00	17.00
12014778B	CATERPILLAR 136.8*165*13.5	136.80	165.00	13.50
CAR 47705	CARRARO 149.9*176*16 NBR	149.90	176.00	16.00
12018750B	CATERPILLAR 150.15*178*13/16	150.15	178.00	13/16
	TA 101.6*127*12.7 NBR	101.60	127.00	12.70
	TAN 35*65*14.5/17 NBF	35.00	65.00	14.5/17
904/50001	BASL 130*160*15	130.00	160.00	15.00

# OHTG9W



APPLICATION	
MATERIAL	NBR+STEEL
TEMP.	-30°C~120°C
PRESSURE	0.3kgf/cm <sup>2</sup>

ITEM	ID	OD	H
OHTG9W 55*90*8/16	55	90	8/16

PETSEALS



**PETSEALS INDUSTRIES LTD.**

ADD: No. 126, Heping Ln., Sec. 1, Zhongshan Rd.,  
Wuri Dist., Taichung City 414, Taiwan

TEL : 886-4-23367239 FAX : 886-4-23366057

E-mail: [petseals@petseals.com](mailto:petseals@petseals.com)